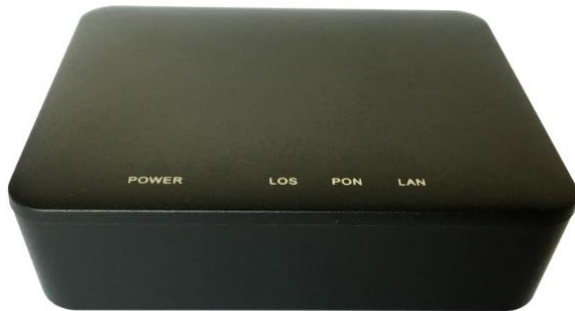


1.25Gbps
Upstream

2.5Gbps
Downstream

ITU-T G.984.X
GPON ONT

1* GPON SC
Uplink port

1*1GE High
Speed LAN
Port

1:128 Fiber
Splitting
Ratio

802.1Q VLAN,
802.1P QOS
DBA

Datasheet V1.1.5

SGN8601GR 1GE GPON ONT Description:

The SGN8601GR is an ITU-T G.984.x based GPON ONT that supports 2.5G downstream and 1.25G upstream bandwidth. It offers 1*Gigabit Ethernet LAN port for Internet outputs. The SGN8601GR is a single family ONU, it supports 8 T-counts and up to 32 Gempport IDs. It is a 1GE GPON ONT for ISPs integrating high speed Internet services over single fiber.

Main Features:

- Complies with ITU-T G.984.x GPON standard, interoperable with Huawei, ZTE, Fiberhome, CHIMA GPON OLTs.
- Offers 1 GPON WAN Port, support 1.25G upstream and 2.5G downstream
- Offers 1*10/100/1000Base-Tx Gigabit LAN port, support Network bridge
- Max 1:128 Fiber ration, max transmission distance can reach 35km
- Support AES 128-bit encrypted and key switching, enhancing transmission security
- Support 8 Tconts and 32 GEM Port IDs, enabling multiple services on a single Subscriber CPE.
- Support FEC (Forward Error Correction), ensures high reliable and precise data transmission
- Support Rich layer 2 Management features, applicable to the biggest ISP networks
- Support FBA (Flexible Bandwidth Assignment), dynamic assign bandwidth automatically
- Support Dynamic Bandwidth Allocation (DBA), Smarter bandwidth assignment and usage.
- High security, data encrypted at upstream and downstream directions
- Support L2 Switching features, such as IEEE802.1Q VLAN, 802.1P QOS,etc
- Support OMCI and TR069 Management, manage subscribers remotely.
- Supports IPv4 and IPv6, highly applicable in both IP type based networks.

GPON Parameters

ITU-T G.984.x GPON, Class B+ 2*10 SFF GPON transceiver, SC/APC
1310nm upstream & 1490nm downstream
Support G.984.1 General Characteristics
Support G.984.2 Physical Media Dependent (PMD) layer Specification
Support G.984.3 Transmission convergence layer Specification
Support G.988 OMCI protocol
GPON transceiver sending power: 0.5-5dbm, receiving sensitivity: -27dbm
Transmission wavelength: Upstream: 1310nm / Downstream: 1490nm
Support 1:128 Fiber Optic Ratio at 35km transmission distance.
Fiber Transmission cable: G.652 Single mode optical fiber cable
Configurable AES decryption on downstream payload.
Configurable FEC on both upstream and downstream payloads.
Multi-Application Processor queues for dedicated connections for in-band.
Enhanced GPON debug and diagnostic functions.
Support up to 8 Transmission Container (T-Cons), 32 GEM Port IDs
Support NSR/SR Dynamic Bandwidth Allocation (DBA)
Support Forward Error Correction (FEC)
Maximum 2.488 Gbps Downlink/1.244 Gbps Uplink
Support Dying Gasp

Hardware Features:

- ITU-T G.984.x GPON standard,
- Realtek RTL9601B Single Core 550Mhz processor
- Offers 1*GPON SC port, support 2.5G at downstream and 1.25G at upstream
- Offers 1*10/100/1000Base-Tx Gigabit Ethernet LAN port
- Support 2Gbps Backplane bandwidth
- live LED Indicators for Power, PON, LOS and LAN
- Desktop design, Plastic housing,
- Plug and Play operation
- External Power Supply
 - Impulse Power Supply, AC 96V-260V input, DC 12V, 0.5A output
 - Support Asia, Europe, U.S, U.K, AU standard power plugs

Software Features:

- Support IEEE802.1Q VLAN, Port Based VLAN
- Support IEEE802.1P QOS, TOS, COS
- Support IEEE802.1d Spanning Tree
- Support IEEE802.1W Rapid Spanning Tree
- Support MAC address translation and MAC addresses limitation
- Support IGMP V1, V2 and IGMP Snooping for multicast

- Support IEEE802.3X full duplex, half duplex backpressure flow control
- Support MAC, IP, or TCP/UDP protocol based ACLs (Access Control protocol)
- Support Bandwidth Control
- Support CLI management, SNMP based NMS management and Monitor

Interoperable GPON OLT Models

- CHIMA** SGT8000A, SGT8016A series GPON OLT
- HUAWEI** MA5680T, MA5606T, MA5683T GPON OLT
- ZTE** C220, C300 GPON OLT
- Alcatel Lucent** 7342, 7360 ISAM GPON OLT
- Fiberhome** AN5516-01, AN5516-02 GPON OLT
- Ericsson** BM1500 GPON OLT
- Aurora** Trident7, T7-PIM-8802/COLT GPON OLT
- Dlink** DPN-3012-E GPON OLT
- Ubiquoss** C9500, C9516, C9016, C9264 GPON OLT
- Raisecom** ISCOM5508,ISCOM5800E, ISCOM6800 GPON OLT
- H3C** S3600-2P-OLT,S7502E,S7503E,S7506E,S7510E,S7506E-V GPON OLT

Specifications:

Standards	ITU-T G.984.1, 984.2, 984.3, 984.4 GPON, ITU-T G.988 OMCI, IEEE 802.3,IEEE 802.3u,IEEE802.3ab, IEEE 802.3x,IEEE 802.3z,IEEE802.1d,IEEE802.1P,IEEE 802.1Q, IEEE 802.1X		
Topology	Star Topology		
Uplink Ports	1 GPON port, SC/APC connector		
Downlink Ports	1* 10/100/1000Base-Tx Gigabit LAN Port		
Transmission Rate	1.25Gbps at upstream, 2.5Gbps at downstream		
Transmission Distance	Maximum 35Km		
LED Indicators	Power, PON, Loss, LAN		
Ethernet Cable	10Base-Tx: UTP category 3, 4,5, up to 100m 100Base-Tx: UTP category 5, up to 100m 1000Base-Tx: UTP category 5, 5E, 6, up to 100m		
Fiber Cable	8.3μm, 8.7μm, 9μm and 10μm single mode fiber cable		
Product Measurement	9.2*7.5*2.7 cm		
Packaging Box Size	10*13.8*7 cm		
Power Supply	AC 96-260V, DC 12V, 0.5A, External Power Supply		
Temperature Humidity		Temperature	Humidity
	Working	0°C - 45°C	10% - 90%
	Standby	-30°C - 60°C	5% - 90% RH